


LAZER ZX6.6 SET UP SHEET



Name Kohta Akimoto Date 16/10/10 Truck / City Yatabe Arena(Astro turf) Event For 2016 Japan nationals

Front Suspension:

Shock Position:



Shock Stay:
 Std.
 Carbon (LAW58)
 Other

Lower Sus Holder Block:


Front A Rear In B

Lower Sus Holder Spacer:

Front 0.5 mm Rear 0.5 mm

Comments: _____

Upper Arm Position:



4.8mm Ball Stud:

97050M(Std)
 UM129

Upper Spacer:

0 mm

Camber

2 °

Bump Steer Spacer:

1 mm

Toe:


In Out 1 °

Sway Bar:

None
 2.0 mm

Ackerman Spacer:

0 mm

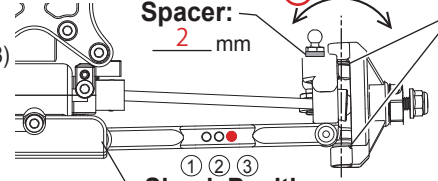

Shock Position:

Wheelbase:

Front 0 mm Rear 1 mm

Axle-Height Spacer:

Up
 Down

Caster Block:

7°
 10°

Stiffener:

Std.
 Carbon Comp. (LAW52)


Front Diff:

Gear Diff. # 10,000

Ball Diff.

Rear Suspension:

Shock Position:



Shock Stay:
 Std.
 Carbon (LAW59)
 Other

Wing Stay Position:

Lower Sus Holder Block:


Front In B Rear Out C

Lower Sus Holder Spacer:

Front 0.5 mm Rear 0.5 mm

Comments: _____

Upper Arm Position:



4.8mm Ball Stud:

97050M(Std)
 UM129

Upper Spacer:

1 mm

Toe In:

1.5 °

Camber

2.5 °

Sus. Arm:

LA272(Std)
 UM713B

Hub Carrier:

Type-B (UM519)
 Type-B2 (UM519-2)

Upper Spacer:

2 mm


0°Type-B(UM519)
 0°Type-B2(UM519-2)
 0°Alu(UMW704-0)
 0.5°Alu(UMW704-05)
 1°Alu(UMW704-1)

Sway Bar:

None
 2.0 mm

Center Plate:

Std.
 Aluminum (LAW55)

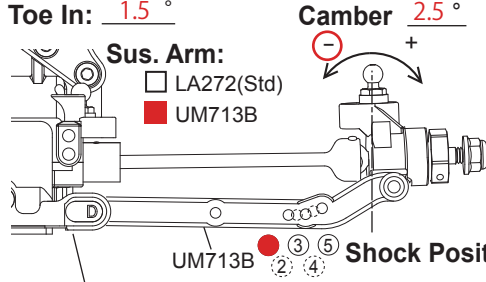

Shock Position:

Wheelbase:

Front 2 mm Rear 0 mm

Wheelbase:

Front: 1 mm
 Rear: 3 mm

Center Drive :

Diff. Gear Slipper Clutch
 # 1,000,000 Separates
 Coming soon Direct

Rear Diff:

Gear Diff. # 10,000

Ball Diff.

Shock:

Shock Piston:

Front 2x1.6 Rear 2x1.6

Shock Oil:

550 # 550

Shock Spring:

Gold Gold

Limiters:

in 0 mm out 0 mm in 0 mm out 1 mm


Shock Length (A):

19.5 mm 28.5 mm


Shock Top Type:

Alu. (UM719/Std) UM753-1

5.8mm Ball End:



Chassis:

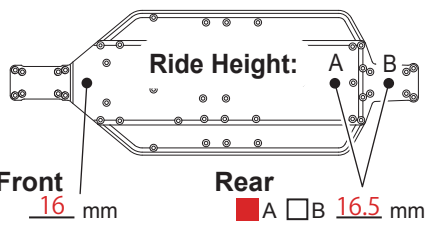

Front 16 mm

Rear A B 16.5 mm

Tire:

Front YAU-6810 Rear YAU-6558

Compound:

YAU-6733 YAU-6734

Wheel:

Std Std

Note:

Electronics:

Battery: Saddle Pack
 Short

Motor Position: Front
 Rear

Servo Mounting: Straight
 Sideways
 Aluminum (LAW56)

Motor Mount Position:
 Std 8mm Front

Battery Position:
 Std 8mm Front

Motor: ORION VST2LW 5.5T

Pinion / Spur: 19/78

ESC: ORION R10.1

Body / Wing:

Body:

BLADE LW

Wing Mount:

Narrow Wide

Wing Dum Height:

20 mm

Wing:

Step 3.0 Round

Wing Angle:

4° 7° 10°

Lip Height:

0 mm

Material:

Screw: Steel Titanium

Pinion Gear:

Steel Aluminum

Shock O-Ring:

O-ring X-ring Red Clear

Comment :

LAW50 Gear Diff Set
 LAW57 Stabilizer Set
 LAB06LW Blade Body (LAZER ZX6/0.6t)

Truck Condition

Smooth Sandy
 Bumpy Soft Dirt
 Low Truction Grass
 Med. Truction Blue Groore
 Higt Truction Clay
 Wet Dusty
 Dry Astro turf